



a warmth for every season



## EZECABLE 240V

### Description

The Ezewarm tile Heating Cables comprise of free running, high tensile, multi- stranded, insulated resistance heating wire laid directly under the finished floor surface. The cable is laid using double sided tape or Ezewarm's unique spacer bars which facilitates easy and quick installation particularly in large areas.

### Product Construction

The tile heating cable is manufactured using dual core heating element. The cable construction is unique to Ezewarm manufactured in our own heating cable manufacturing. Our heating element has been approved by TUV Rheinland and America's UL (Underwriters Laboratories). Each heating mat is individually assembled and subjected to rigorous safety checks.

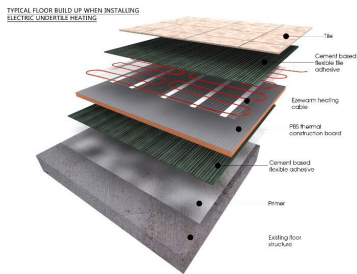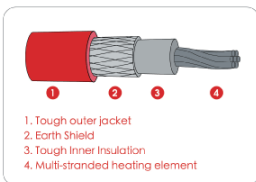

Ezecable Systems 240V			
Heated Area	Wattage (W)	Amps	Cable Length (m)
1-1.4 sqm	200	0.83	16
1.5-2 sqm	300	1.25	24
2 – 2.7 sqm	400	1.67	32
3 – 4 sqm	600	2.5	48
4 - 5.4 sqm	800	3.33	64
5 - 6.7 sqm	1000	4.17	80

- Operating Voltage: 220-240V. 50Hz
- Cable thickness: 3mm
- Primary Cable Insulation: ETFE Fluoropolymer
- Power Output Rating: 200w per m2
- Power Lead: 3m long braided connection lead
- Lifetime warranty and no quibble installation guarantee.

**free phone 0800 644 0181**

[www.ezewarm.com](http://www.ezewarm.com) | [www.ezewarm.co.uk](http://www.ezewarm.co.uk)

[enquiries@ezewarm.co.uk](mailto:enquiries@ezewarm.co.uk)

